



SPRINKLER HEAD



RESPONSE SPRINKLER

STANDARD



UPRIGHT SPRINKLER

Model	UT0003
K Factor GPM/psi ^{1/2} (LPM/bar ^{1/2})	5.6 (80)
Thermos sensitive	5 mm glass bulb
Temperature Ratings	57°C, 68°C, 93°C, 141°C
Thread Siz	1 / 2" NPT
Approve	UL



PENDENT SPRINKLER

Model	UT0005
K Factor GPM/psi ^{1/2} (LPM/bar ^{1/2})	5.6 (80)
Thermos sensitive	5 mm glass bulb
Temperature Ratings	57°C, 68°C, 93°C, 141°C
Thread Siz	1 / 2" NPT
Approve	UL



SIDEWALL SPRINKLER

Model	UT0001
K Factor GPM/psi ^{1/2} (LPM/bar ^{1/2})	5.6 (80)
Thermos sensitive	5 mm glass bulb
Temperature Ratings	57°C, 68°C, 93°C, 141°C
Thread Siz	1 / 2" NPT
Approve	UL



CONCEALED PENDENT SPRINKLER

Model	UT0009
K Factor GPM/psi ^{1/2} (LPM/bar ^{1/2})	5.6 (80)
Thermos sensitive	5 mm glass bulb
Temperature Ratings	57°C, 68°C, 93°C, 141°C
Thread Siz	1 / 2" NPT
Approve	UL

UL LISTED



UPRIGHT SPRINKLER

Model	UT0004
K Factor GPM/psi^{1/2} (LPM/bar^{1/2})	5.6 (80)
Thermos sensitive	3 mm glass bulb
Temperature Ratings	57°C, 68°C, 93°C, 141°C
Thread Siz	1 / 2" NPT
Approve	UL




PENDENT SPRINKLER

Model	UT0006
K Factor GPM/psi^{1/2} (LPM/bar^{1/2})	5.6 (80)
Thermos sensitive	3 mm glass bulb
Temperature Ratings	57°C, 68°C, 93°C, 141°C
Thread Siz	1 / 2" NPT
Approve	UL



CONVENTIONAL SPRINKLER

Model	UT0008
K Factor GPM/psi^{1/2} (LPM/bar^{1/2})	5.6 (80)
Thermos sensitive	3 mm glass bulb
Temperature Ratings	57°C, 68°C, 93°C, 141°C
Thread Siz	1 / 2" NPT
Approve	UL

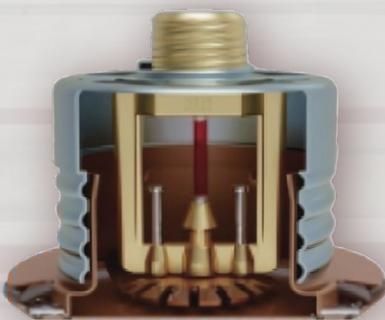

CONCEALED PENDENT SPRINKLER

Model	UT0010
K Factor GPM/psi^{1/2} (LPM/bar^{1/2})	5.6 (80)
Thermos sensitive	3 mm glass bulb
Temperature Ratings	57°C, 68°C, 93°C, 141°C
Thread Siz	1 / 2" NPT
Approve	UL

RESPONSE SPRINKLER

*" safety
is not decoration."*

FINELINE



SUPA RICH CO.,LTD.

27 Ramintra Soi 48, Ramintra Road, Ramintra, Khan Na Yao, Bangkok 10230

Tel: 062-6242516, 02-509-4438

Email: Info@finelineth.com